



## Lake Palaces

(A unit of KTDC Ltd-Government of Kerala undertaking)

Periyar Tiger Reserve, Thekkady, Idukki-685509, Kerala

Phone +91-4868-250111 Fax: +91- 04869-222282

E-mail: [lakepalaceoffice@gmail.com](mailto:lakepalaceoffice@gmail.com)

Web site: [www.ktdc.com](http://www.ktdc.com)

KTDC/LP/EST/QN/2024-25/

11.02.2025

### Re-QUOTATION NOTICE

Competitive quotations in sealed covers are invited from eligible contractors and established firm having GSTIN and PAN No. for the work noted below as per the scheduled/BOQ attached.

SL No	Name of work	Time of Completion
1	Providing of Roof and Grill door at Lake palace, Thekkady	3 months

#### General Conditions

1. The rate shall be inclusive of GST, all taxes, duties, loading, unloading and other incidental expenses and net.
2. The bidder shall visit/ inspect the site before submitting the quotation.
3. The bidder shall submit the valid licensed along with the quotation.
4. The successful bidder shall obey the rules and regulation of forest department/ Periyar tiger reserve authority.
5. The successful bidder will have to deposit an amount equal to 5% of the total quoted amount as security deposit and also execute agreement in stamp paper worth Rs.200/- for the due fulfillment of the contract.
6. The successful bidder shall obtain approvals for the materials and detail of proposed work from the engineering officials of KTDC.
7. The work should be completed as per the accompanied specification within **3 months** of receipt of work order/executing agreement.

The quotation will be available from **13/02/2025 10.00 AM** and the offer shall reach the office of the Manager, KTDC Lake palace, Thekkady on or before **27/02/2025 up to 2.30 PM** & the quotation will be opened **at 3.30PM** on the same day.

The Management reserves the right to reject any or all quotations without assigning any reason thereof.

If the last date mentioned falls as a holiday or Harthal, the very next working day will be treated as the last date/ opening date.


**Signed by Binoy P P**

**Date: 11-02-2025 12:28:50**


**MANAGER**

BOQ OF THE WORK - Provision of Roof and Grill Door at Lake Palace, Thekkady					
Sl.No.	Qty	Unit	Description	Rate with tax	Amount
1	10	sqm	15.31 Dismantling tiled roofing with battens, boarding etc. complete including stacking of serviceable material and disposal of unserviceable material within 50 metres lead.		
2	23.41	sqm	Providing & fixing Poly carbonate solid sheet 6 mm thick as approved by the Engineer in charge and should be supplied in a single length of 12m or as decide by the Engineer in charge. The sheets shall be fixed using self drilling/self tapping screw of size (5.5x55mm) with EPDM seal complete upto any pitch in horizontal/vertical curved surfaces, but excluding the cost of purlins, rafters, trusses, and including cutting		
3	300	kg	10.16.1 Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete.Hot finished welded type tubes.		
4	12	sqm	od110538/2024_2025 Providing weld wire mesh for gate and grill covering including all materials, labour, conveyances etc complete		
5	8	m	od110707/2024_2025 Providing and fixing Aluminium Rain Water Gutter with clamp and all necessary accessories required for supporting including the cost of labour and making necessary connections etc complete		
6	12	sqm	13.52.1 Finishing with Epoxy paint (two or more coats) at all locations prepared and applied as per manufacturer's specifications including appropriate priming coat, preparation of surface, etc. complete.On steel work		
TOTAL					

POLYCARBONATE SHEET ROOFING AND GATE WORK AT LAKE PALACES, THEKKADY

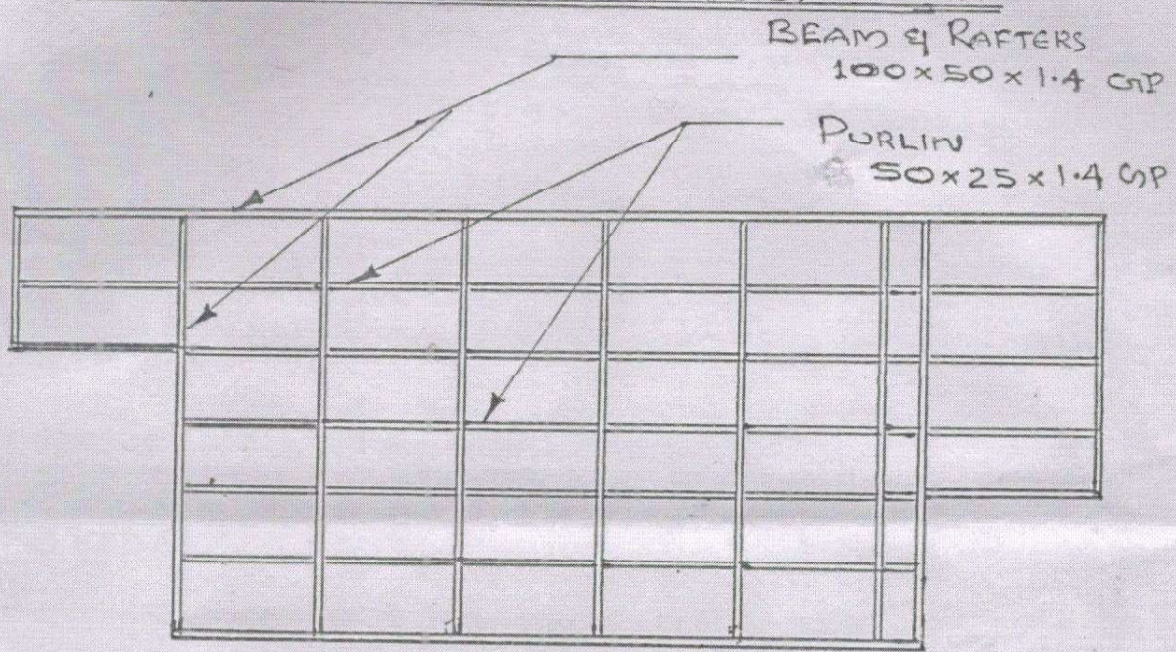

POLYCARBONATE SHEET ROOFING

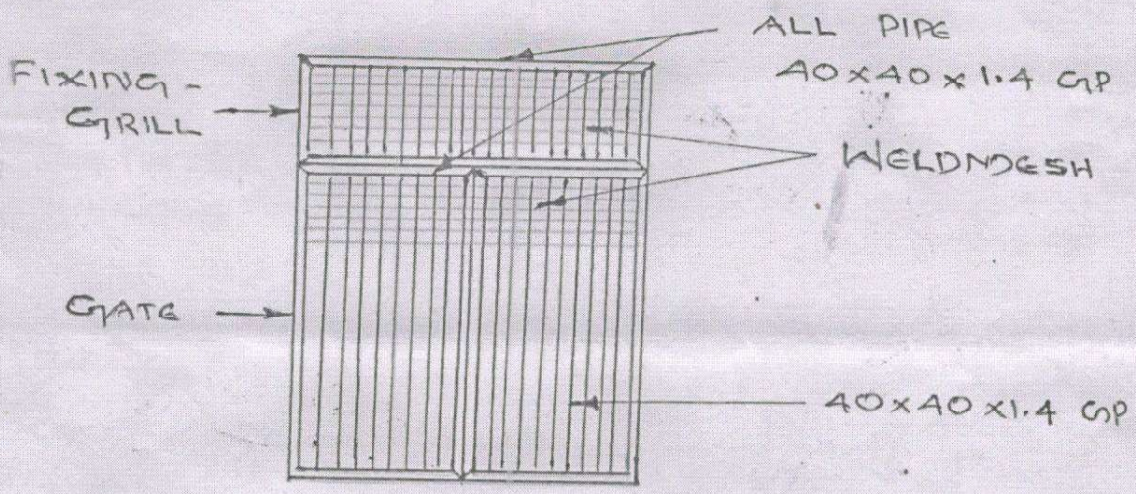

GATE AND GRILL

KTDC THEKKADY

MANAGER  
LAKE PALACE  
KTDC THEKKADY